




Fast and powerful lasers for marking delicate substrates with high contrast marking.

Meet the needs of each industry at an affordable price



D DUO Series
INDUSTRIAL DPSS LASER
High quality marking for plastics and delicate substrates

D Duo Series

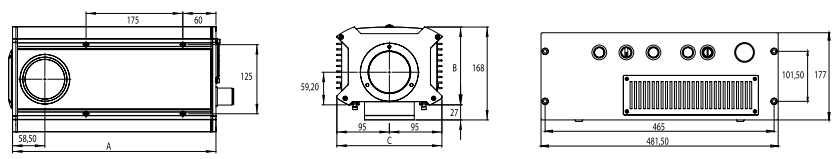

D-DUO & GREEN DUO & UV (DPSS)														
MODEL				Series D DUO				GREEN DUO ^{PS}				UV		
POWER				6W	10W	20W		5W	10W	1,5W		5W		
WAVELENGTH				1,064 μm 1-0.04 nm				532 nm				355 nm		
LASER SYSTEM				D - 5000 DUO				GREEN				UV		
MAINS SUPPLY				100V - 240V 50 / 60 Hz (1 Phase + N) 300 VA		100V - 240V 50 / 60 Hz (1 Phase + N) 400 VA		100V - 240V 50 / 60 Hz (1 Phase + N) 300 VA		100V - 240V 50 / 60 Hz (1 Phase + N) 400 VA		100V - 240V 50 / 60 Hz (1 Phase + N) 600 VA		
DIMENSIONS		Head		601x190x141 mm									314x106x108 mm	
		Rack		550x480.5x177 mm										
WEIGHT (Falta comprovar)				Net weight: 28Kg Gross Weight: 33Kg									Net weight: 18Kg Gross Weight: 20Kg	
COOLING				Air										
SYSTEM				Resonator of the laser source, DACs board, drivers of the scanners, and galvanometric scanners built into the laser and marking head. Control and power electronics, CPU, power supplies and laser source pumping unit built into the control rack.										
FOCAL SPECIFIC.	TECHNOLOGY			D DUO				GREEN				UV		
				F -	6	10	20	F -	5	10	PICO	F -	5	
	MA (mm)	WD (mm)	FL (mm)	BD (μm)	PD (KW/cm2)	PD (KW/cm2)	PD (KW/cm2)	BD (μm)	PD (KW/cm2)	PD (KW/cm2)	PD (KW/cm2)	BD (μm)	PD (KW/cm2)	
	55x55	141	100	16	5825	9709	19417	10	12333	13875	2081	5	43278	
	100x100	205	163	26	2192	3654	7308	17	4642	5222	783	9	16289	
	168x168	347	254	41	903	1505	3009	26	1912	2151	323	-	-	
	212x212	458	346	56	487	811	1622	35	1030	1159	174	-	-	
	242x242	554	420	68	330	551	1101	-	-	-	-	-	-	
	500x500	889	815	132	88	146	292	-	-	-	-	-	-	
SOFTWARE				• ScanLinux V5.2.7 and later. • Marca Software V5.6.9 and later. • Internal Barcode.										
USER INTERFACE				• Touch Screen. • Hand Held Terminal. • Pc.										
CONTROLLED BY				• Hand Held Terminal with ScanLinux software. • Touch Screen with ScanLinux software. • Full Graphics Interface: includes Marca software™, dongle and Ethernet cable (TCP / IP). • Marca Lite Software: includes Marca™ software, dongle and Ethernet cable (TCP / IP).										
LASER SOURCE				• End pumped Nd:YAG resonator by an optical fiber. • Beam pointer (optional red diode).										
ACCESSORIES				Handheld Terminal-Touch Screen Terminal - Beam pointer - Encoder Kit - Photocell Kit - Alarm Kit Fume Extractor - Mounting support - Mounting Bracket U-ARM - Marking paper - Protection goggles - Air Cooling Kit - Water Cooling Kit (only for UV)										
ENVIRONMENTAL CONDITIONS				+15°C (59°F) at 40°C (104°F) external temperature with 50% Duty Cycle or 36°C(100°F) external temperature with 100% Duty Cycle. Humidity between 10% and 95%, without condensation. UV working humidity: 30-80%. No vibrations.										

* **MA**: Marking Area | **FL**: Focal Length (The distance between the center of the lens and the surface to be marked.)
WD: Working Distance (The distance between the laser system base and the surface to be marked.)
BD: Spot Beam Diameter | **PD**: Power Density
These values are an approximation, and they are different for each laser system, due to the different optical paths.




Coding, tracing and marking solutions worldwide



(00) 34 93 873 87 98 macsa@macsa.com www.macsa.com	Macsa ID Headquarter Pl. Pla de Santa Anna 08272 Sant Fruitós de Bages (Barcelona) Tel: +34 938 738 798 Spain	Macsa ID UK 13d Old Bridge Way Shefford Bedfordshire SG175HQ +44 (0)1462 816091 UK	Macsa ID Portugal Rua Eng. Frederico Ulrich n. 2650. 4470 - 605 Moreira Maia Tel: +351 229962204 Portugal	Macsa ID Malaysia E-8-03, The Gamuda Biz Suites No.12, Jalan Anggerik Vanilla 31/99, Kota Kemuning, 40460 Shah Alam Selangor Malaysia	Macsa Coding Technology (shenzhen) Co, Ltd East side of 2/F, 7 Building Lijincheng Technology Industry Park Jihua Road Longhua Street, Longhua District 518100 Shenzhen Tel: +86 0755-23611591 China
--	---	---	--	--	--

Version AUGUST 2019



D DUO Series by MACSA
Reliable. Smart. Easy

INDUSTRIAL DPSS LASER


D DUO Series

A family of industrial DPSS lasers.

D DUO lasers are designed for industrial laser marking applications. In-built motion control, TCP-IP communication and digital I/O make it possible to integrate the laser in to most production lines. Alternatively D-Duo lasers can be installed in workstations for standalone applications.

They are fast and powerful lasers **designed for marking delicate substrates and for coating ablation**. High contrast marks can be achieved with no thermal damage to the substrate.

The lasers are available in a range of different powers meaning that they can meet the needs of most applications at an affordable price.

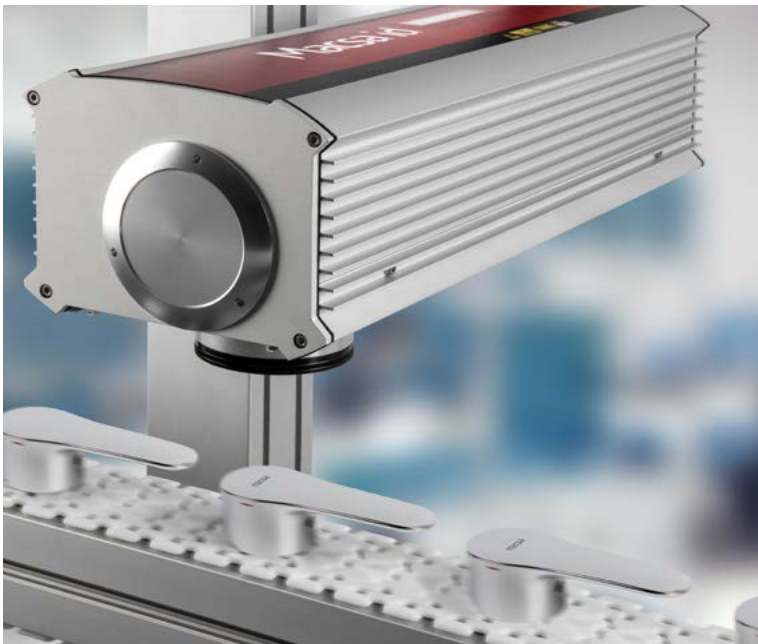

Dual processor architecture for fast cycle times even with variable data.

D DUO lasers are short pulse, high peak power lasers and are available in 1064nm, 532nm (Green) and 355nm (UV) wavelengths.

Compatible with the iLaserBox range of workstations

D DUO

For delicate substrates

The D-5000 SERIES is an end-pumped DPSS Laser system, on a Nd:YV04 active medium. Ideal for marking delicate substrates and coating ablation.

- D-5000 lasers have short pulse width to minimize thermal impact
- Compact head design is ideal for high-speed, on-line integration
- D-5000 lasers include full 3 axis motion control for driving external axes.



D DUO UV

For thermo formed and exotic plastics

The D 5000 UV 5 is a DPSS Laser system, based on a Nd: YV04 active medium.

- Solid state Nd: YV04 laser $\lambda = 355\text{nm}$
- Wide range of materials – Thermo-formed and exotic plastics.
- Water-cooled
- Single phase power input
- Easily integrated into automated production line or the iLaserBox range of workstations



D DUO GREEN

For marking plastics with minimal thermal impact

The gLASER series is a DPSS Laser system, based on a Nd: YV04 active medium. gLASER series deliveries a high beam performance at a wavelength of 532nm.

- D DUO Green lasers are short pulse, high peak power lasers
- Ideal for marking plastics with minimal thermal impact.
- Air cooled
- Single phase power input
- Available as PS model with shorter pulse width and higher peak power
- Easily integrated into automated production line or the iLaserBox range of workstations





Macsa lasers are very easy to use thanks to our powerful proprietary marking software.

Marca makes it simple to code and mark precisely and consistently. A userfriendly software to create text, 1D and 2D codes, 3D graphics, graphical files, etc...



The modular software to control, manage and optimize the production line.



Solution of monitoring services, predictive maintenance, remote assistance and production support





3D marking

2D marks can be mapped to regular 3D geometries such as cylinders, spheres and cones. Additionally irregular geometries can be loaded as 3D CAD files in to Marca software enabling 2D marks to be mapped to irregular 3D surfaces.

The Macsa 3D scan head greatly simplifies the mechanical handling of 3D geometries and can eliminate the need for rotary and robotic handling devices. This can significantly increase productivity.

3-D Print Head transform your 2D laser to 3D

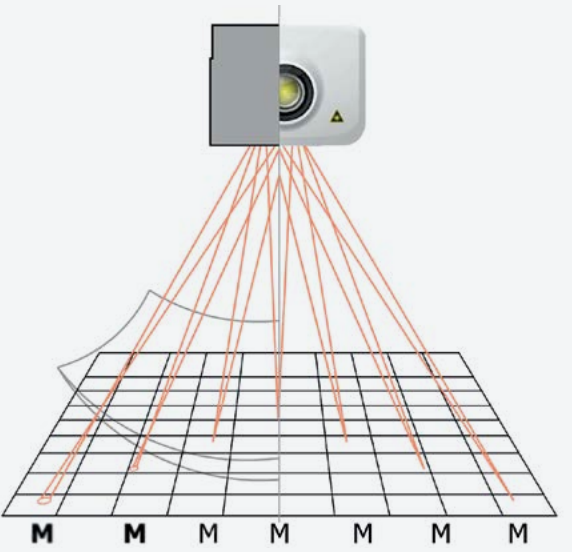

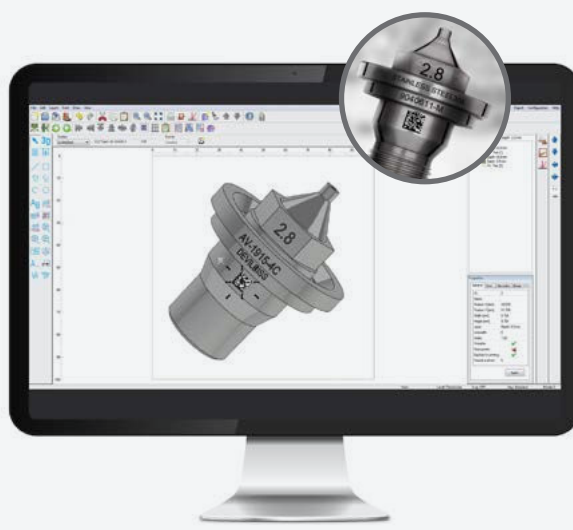

DUO by Macsa

Dual Processor Technology Lasers by Macsa allows high precision marks to be produced even with variable data with no loss of performance. This technology dedicates one processor to data processing and the other to controlling the laser.

MACSA LASER SYSTEM

Low - speed marking

High - speed marking



OTHER

Low - speed marking

High - speed marking

